





# SFW20 Tunable White Silicone Flexible LED Wall Grazer

SFW20-24V-3535-24-DW

Specification

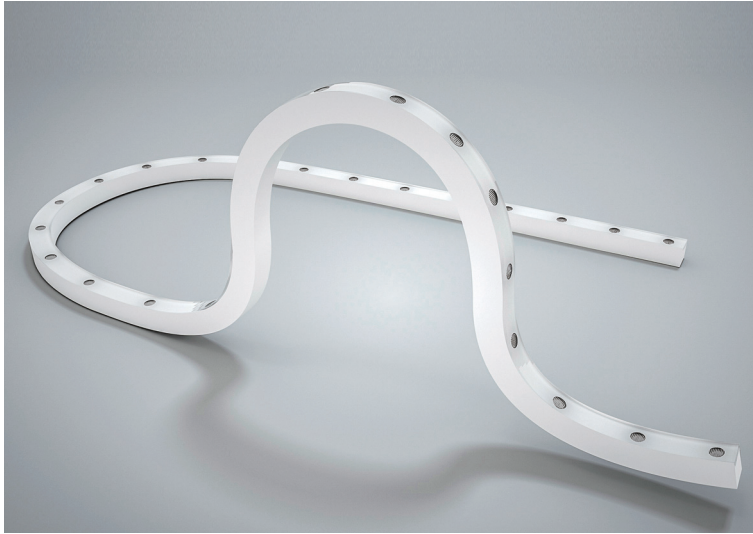


Dimension



20°x40° Distribution	Ansi C78.377	SDCM<3	One Bin	Dimmable	IP68 Submersible
Ambient Temp. 55°C / -40°C	Class 3	LM-80	IK08	UV Resistant	Saltwater Resistant
Flame Resistant	Solvents Resistant	Dirt Resistant	CE	RoHS	5 years warranty Warranty


Optional LENS Distribution

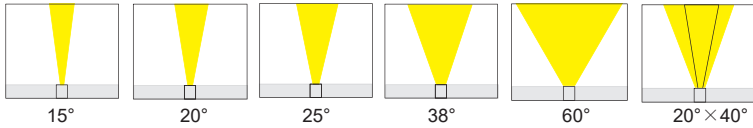


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	19W/m
Physical	
LED Count	24 LEDs/m
Cutting Unit	3 LEDs
Cutting Unit Length	125mm
Mini. Curvature Radius:	250mm(Horizontal)/400mm(Vertical)
Output	
LED Light	Epistar SMD LED 3535
CRI	>80
Max Length	5 M
Optional Lens	15°, 20°, 25°, 38°, 60°, 20°x40°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68


Color Combinations




Illuminance Distribution

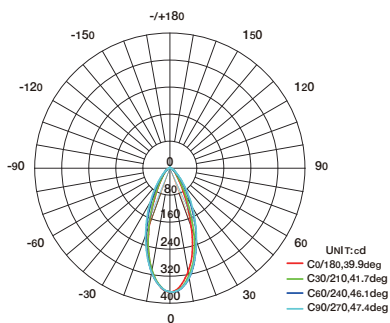

AVERAGE BEAM ANGLE(50%):43.8 DEG  
**2700K Angle: 20° X 40°**

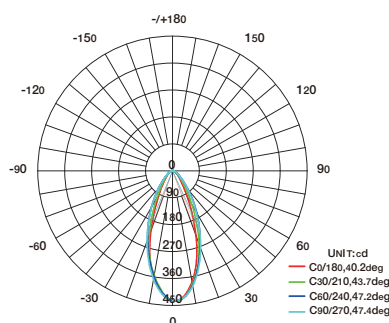

AVERAGE BEAM ANGLE(50%):44.6 DEG  
**6000K Angle: 20° X 40°**

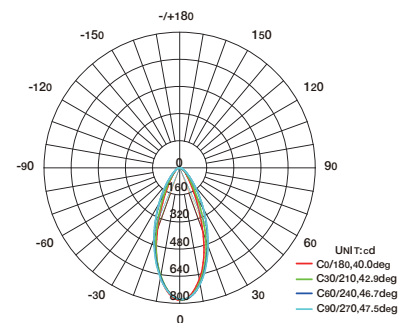

AVERAGE BEAM ANGLE(50%):44.3 DEG  
**2700K+6000K Angle: 20° X 40°**

# SFW20 Tunable White Silicone Flexible LED Wall Grazer

## Connection

