






# SFW20 Multi Color RGB Silicone Flexible LED Wall Grazer

SFW20-24V-3535-24-RGB


Specification

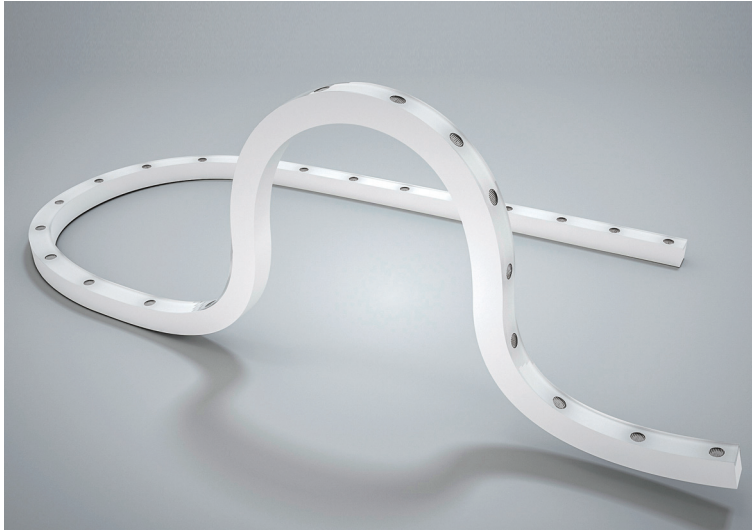

Dimension

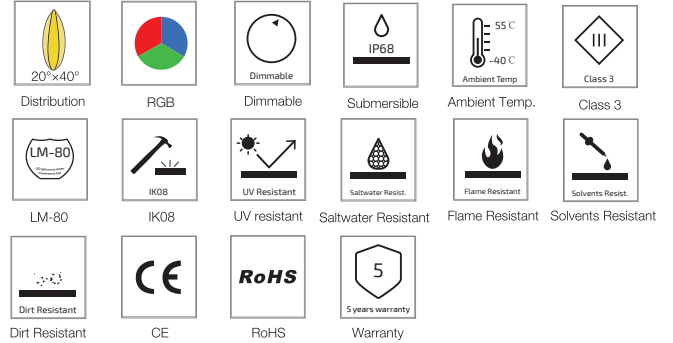


Optional LENSs Distribution

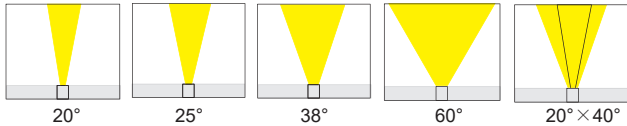




Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	18W/m
Physical	
LED Count	24 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	250mm
Mini. Curvature Radius:	250mm
Output	
LED Light	Epistar SMD LED 3535
CRI	>80
Max. Length Single Feed	4 M
Optional Lens	20°, 25°, 38°, 60°, 20°x40°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68

Emitting Color



Illuminance Distribution

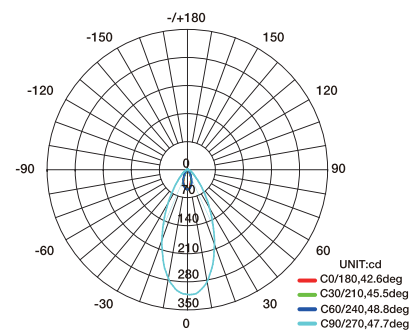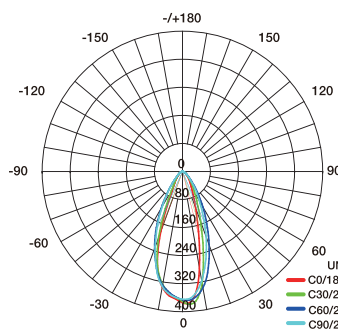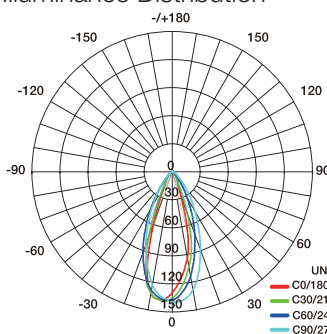

# SFW20 Multi Color RGB Silicone Flexible LED Wall Grazer

## Connection

