



# SFW20 SPI Pixel Chasing RGBW Silicone Flexible LED Wall Grazer

## Specification

SFW20-24V-3535-24-SPI4-RGBW

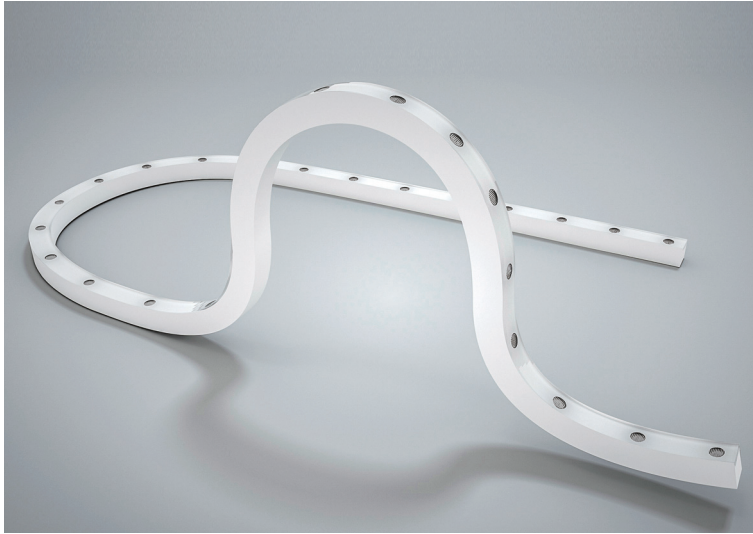


## Dimension

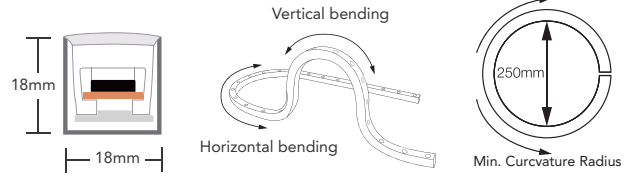

20°×40° Distribution	Pixel RGBW	SPI Programmable	One bin	Dimmable	IP68
Ambient Temp. 55°C / -40°C	Class 3	LM-80	IK08	UV Resistant	Saltwater Resistant
Flame Resistant	Solvents Resistant	Dirt Resistant	CE	RoHS	5 years warranty

## Optional LENSs Distribution

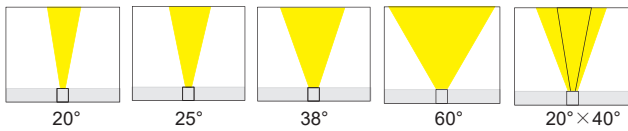

## Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	23W/m
Physical	
LED Count	24 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	250mm
Mini. Curvature Radius:	250mm(Horizontal)/400mm(Vertical)
Output	
LED Light	Epistar SMD LED 3535
Color	RGBW(3000K/4000K/6000K)
Working Mode	SPI
Pixels Quantity	4 Pixels/m
IC Chips	UCS8904
Max Length	5 M
Optional Lens	20°, 25°, 38°, 60°, 20°x40°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C

Emitting Color	Lumen Output
Red	88lm/m
Green	248lm/m
Blue	138lm/m
3000K	188lm/m


  

Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C


Dependability	
Warranty	5 Years Warranty
IP Rating	IP68

## Illuminance Distribution

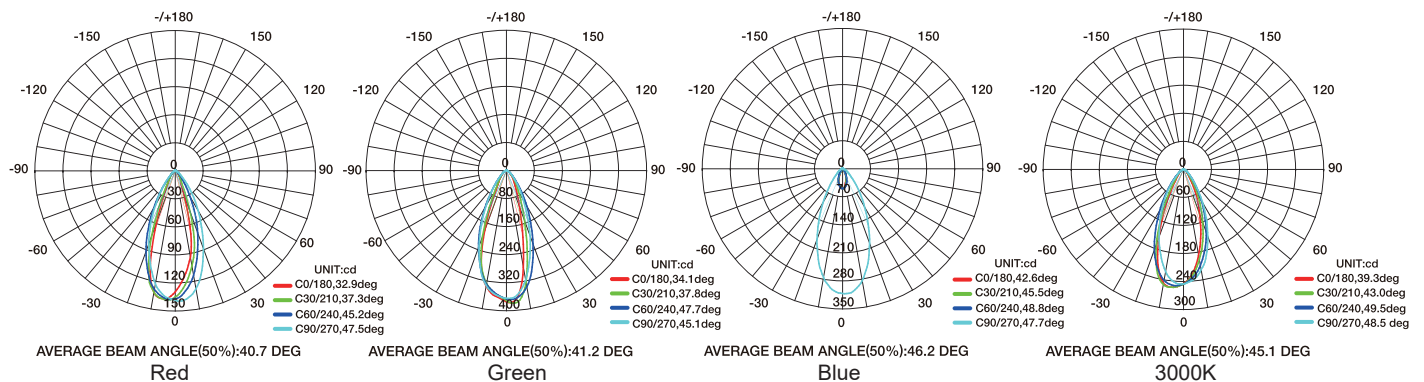

# SFW20 SPI Pixel Chasing RGBW Silicone Flexible LED Wall Grazer

## Connection

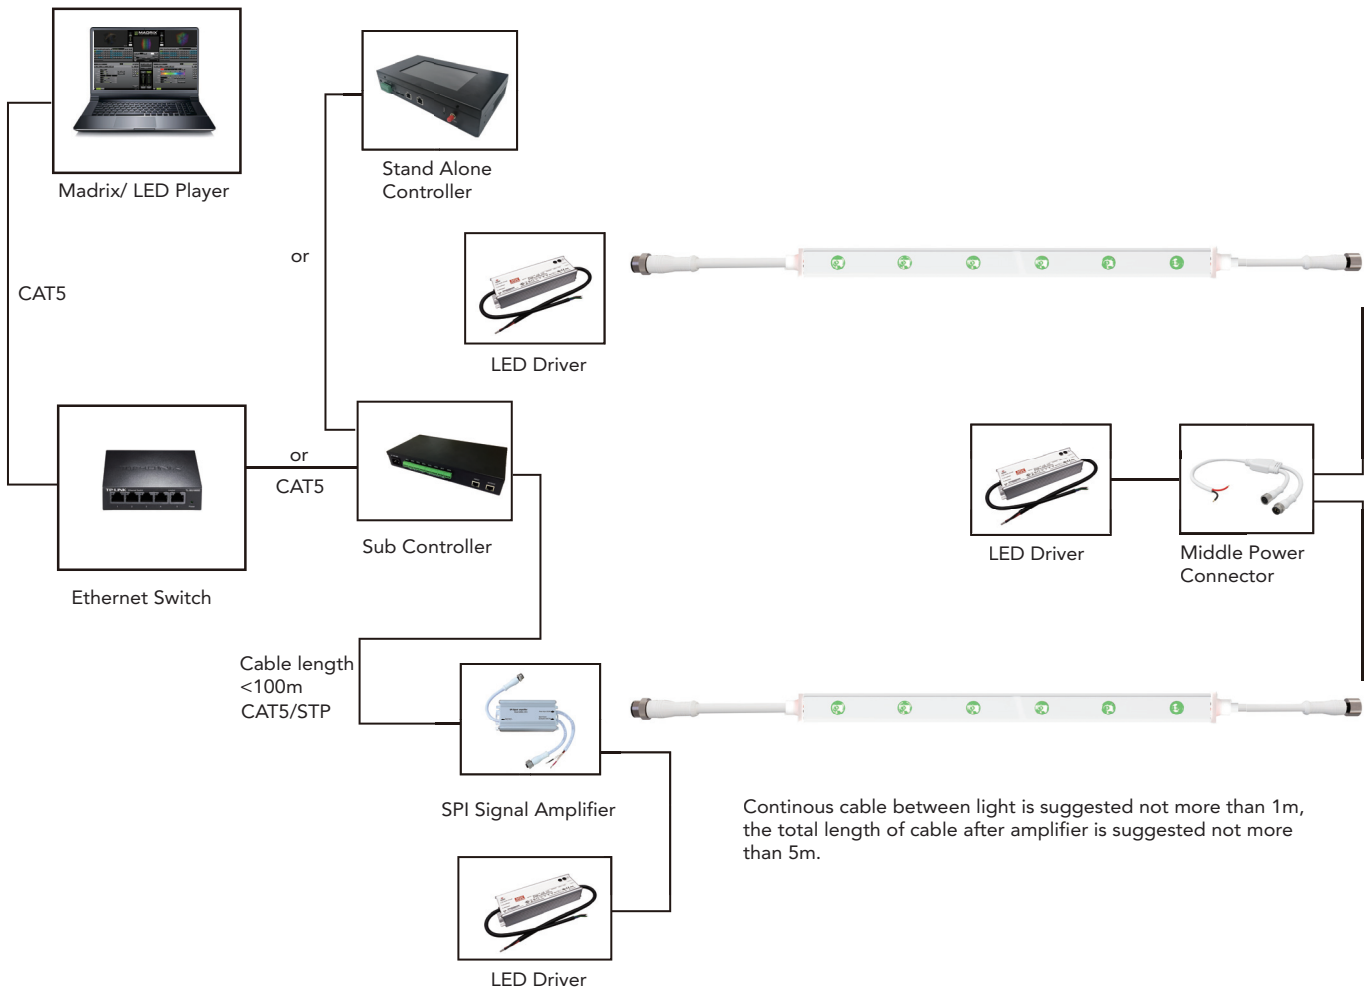

Continuous cable between light is suggested not more than 1m, the total length of cable after amplifier is suggested not more than 5m.